#03039 RP-1716DR
USER'S MANUAL

16-P 10/100Mbps NWay Switch

User's Manual

V2.0

CE Declaration of conformity

This equipment complies with the requirements relating to electromagnetic compatibility, EN 55022 class A for ITE, the essential protection requirement of Council Directive 89/336/EEC on the approximation of the laws of the Member States relating to electromagnetic compatibility.

FCC Warning

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limitations are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if no installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into a different outlet from that the receiver is connected.

- Consult your local distributors or an experienced radio/TV technician for help.

- Shielded interface cables must be used in order to comply with emission limits.

Changes or modifications to the equipment, which are not approved by the party responsible for compliance could affect the user's authority to operate the equipment.

Table of Contents
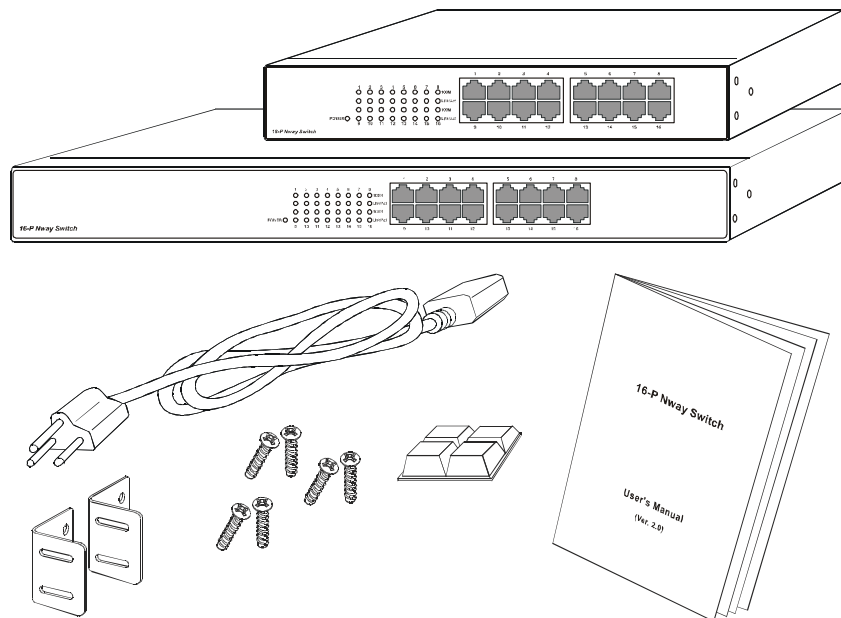
5. Product Specifications

1. Unpacking Information

Thank you for purchasing the 16-port NWay switch. Before you start, please check all the contents of this package.

The product package should include the following:

1. One 16-port NWay switch

2. One power cord

3. Rubber foot and screws

4. Rack-mount brackets (optional for 11-inch model)

5. User's Manual

2. Introduction To 16-Port NWay Switch

2.1 General Description

The device is a powerful, high-performance Fast Ethernet switch, with all 16 ports capable of 10 or 100Mbps auto-negotiation operation (NWay) which means the switch could automatically negotiate with the connected partners on the network speed and duplex mode. It is ideal for micro-segmenting large networks into smaller, connected subnets for improved performance, enabling the bandwidth demanding multimedia and imaging applications. Moreover, the 10/100Mbps auto-sensing ability provides an easy way to migrate 10Mbps to 100Mbps networks with no pain. Compared to the shared 10Mbps or 100Mbps networks, the switch delivers a dedicated 10/100Mbps connection to every attached client with no bandwidth congestion issue.

Store-and-forward switching mode promises the low latency plus eliminates all the network errors, including runt and CRC error packets. To work under full-duplex

mode, transmission and reception of the frames can occur simultaneously without causing collisions as well as double the network bandwidth.

The switch is plug-n-play without any software to configure and also fully compliant with all kinds of network protocols. Moreover, the rich diagnostic LEDs on the front-panel provide the operating status of individual port and whole system.

For network connection:

The switch can use the following types of cabling:

■   10BASE-T Category 3, 4 or 5 UTP/STP

■   100BASE-TX Category 5 UTP/STP

Category 5 cable is preferred to use with this product in structured wiring environments. This will ensure correct operation of all ports at 10Mbps or 100Mbps.

2.2   Key Features

The switch provides the following key features:

■   Complies with 10BASE-T specifications of the IEEE802.3 standard
■   Complies with 100BASE-TX specifications of the IEEE802.3u standard
■   Sixteen RJ-45 ports for 100BASE-TX and 10BASE-T connectivity
■   Supports NWay protocol for speed (10/100Mbps) and duplex mode (Half/Full) auto-detection
■   Supports MDI/MDI-X auto crossover
■   Supports full and half duplex operation on all ports
■   Wire-speed packet filtering and forwarding rate
■   Store-and-forward architecture filters fragment & CRC error packets

- Supports 8K MAC address entries and 128 entries of CAM
- 512KBytes buffer memory
- Supports extensive LED indicators for network diagnostics
- Internal universal switching power supply (100 ~ 240VAC)
- FCC Class A, CE

2.3 The Front Panel

The front panel of the switch is shown as below.

11-inch model

19-inch model

The auto-negotiation feature of the switch allows each port of the device running at one of the following four operation modes:
1. 100Mbps full-duplex
2. 100Mbps half-duplex
3. 10Mbps full-duplex
4. 10Mbps half-duplex

7

＊Each 10/100Mbps port supports auto MDI-X capability that is the port could connect either the PC or switch without any cable adjustment.

2.3.1 System LEDs
System LED indicators are located on the front panel for showing the operating status of the whole device.

2.3.1.1 Power LED
This indicator lights green when the switch is receiving power; otherwise, it is off.

2.3.2 Port LEDs
Port LED indicators are located on the front panel for showing the operating status of each port.

2.3.2.1 100M LED
Every port has a 100M LED. Steady green indicates that the port is operating at 100Mbps. If the LED is off, the link speed is 10Mbps.

2.3.2.2 Link/Act LED
Every port has a Link/Activity LED. Steady green indicates that the port has good linkage to its associated devices. Flashing green indicates there is traffic transverses the port.
The following table is a summary of Port LEDs.

LED	Operation
100M	Link speed is 100Mbps (Green)
	Link speed is 10Mbps (Off)
Link/Act	The port is connected (Green)
	The port is transmitting/receiving data (Blinking Green)

If the port is connected but the Link/Activity LED is dark, check the following items:

1. The switch and the connected device's power are on or not
2. The port's cable is firmly seated in its connectors in the switch and in the associated device.
3. The connecting cable is good and with correct type
4. The connecting device, including any network adapter is functioning.

8

2.4 The Rear Panel

The rear panel of the switch is shown as below

AC LINE
100-240VAC
50~60Hz
1.0A Max

11-inch model

AC LINE
100-21DVAC
50~ 60Hz
1.0A Max

19-inch model

2.4.1 Power Connecting

For compatibility with electric service in most areas of the world, the switch's power supply automatically adjusts to line power in the range 100~240 VAC and 50~60 Hz.

Plug the female end of the power cord firmly into the receptacle on the rear panel of the switch. Plug the other end of the power cord into an electric service outlet then the power will be ready.

3. Installing And Using 16-Port NWay Switch

3.1 Installing The 16-Port NWay Switch

The switch does not require software configuration. Users can immediately use any of the features of this product simply by attaching the cables and turning the power on.

3.1.1 Desktop Installation
Locate the switch on the desktop and place the switch on a clean, flat desk or table close to a power outlet. Plug in all network connections and the power cord, then the system is ready.

When deciding where to put the switch, you must ensure:
- It is accessible and cables can be connected easily
- Cabling is away from:
  * Sources of electrical noise such as radios, transmitters and broadband amplifiers
  * Power lines and fluorescent lighting fixtures.
- Water or moisture can not enter the unit
- Air flow around the unit and through the vents in the side of the case is not restricted (company recommend that you provide a minimum of 25 mm clearance)

To prolong the operational life of your units:
- Never stack units more than eight high if freestanding.
- Do not place objects on top of any unit or stack
- Do not obstruct any vents at the sides of the case

3.1.2 Rack-Mount Installation (Rack-mount kit is optional)
The switch may standalone, or may be mounted in a standard 19-inch equipment rack. Rack mounting produces an orderly installation when you have a number of related network devices. The switch is supplied with optional rack mounting brackets and screws. These are used for rack mounting the unit.

Rack Mounting the Switch in the 19-inch rack:

1.   Disconnect all cables from the switch before continuing.
2.   Place the unit the right way up on a hard, flat surface with the front facing toward you.
3.   Locate a mounting bracket over the mounting holes on one side of the unit.
4.   Insert the screws and fully tighten with a suitable screwdriver.
5.   Repeat the two previous steps for the other side of the unit.
6.   Insert the unit into the 19" rack and secure with suitable screws (not provided).
7.   Reconnect all cables.

3.1.3   Installing Network Cables
After placing the switch on the desktop, then we need to know how to connect the device to network.

3.1.3.1   Station Connections with Twisted-Pair Cable
Connect each station to the switch by a twisted-pair straight cable (10BASE-T or 100BASE-T cables). Plug one RJ-45 connector into a front-panel port of the switch, and plug the other RJ-45 connector into the station's network adapter.

3.1.3.2   Switch to Switch Connections with Twisted-Pair Cable
In making a switch to switch connection, you could use any port to connect another switch with straight or cross-over cable. As all the ports support auto MDI-X function, so the connection is independent of cable type and using a straight cable to make a switch to switch connection is allowed.
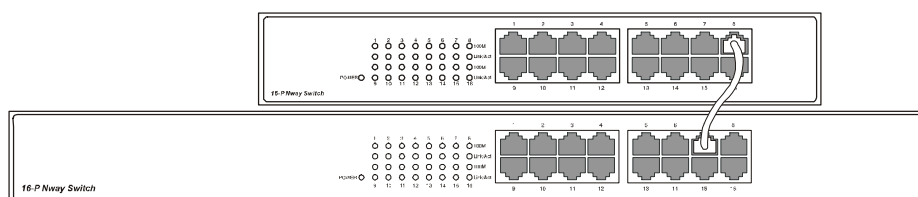
3.1.3.3   Network Application
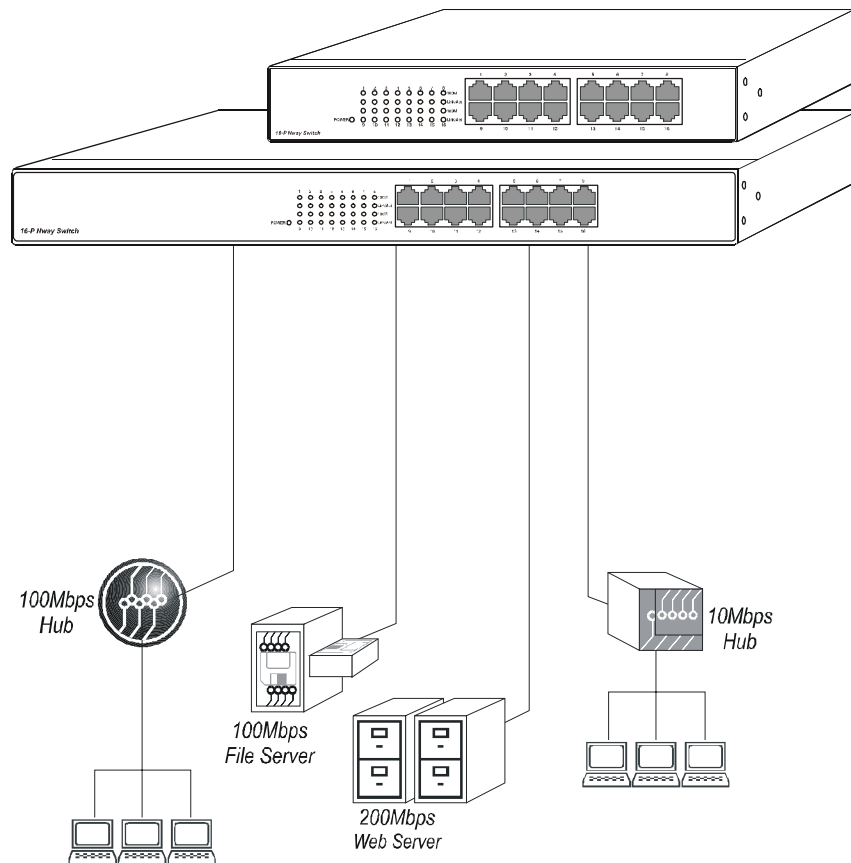
4.   Switch Operation

4.1   MAC Address Table and Learning

The switch is implemented with a MAC address table where is composed of many entries. Each entry is used to store the address information of network nodes on the network, including MAC address, port ID, etc. The information is the most important base to do packet filtering and forwarding.

When one packet comes in from any port, the switch will learn the source address, port ID, and the other related information in address table. Therefore, the content of the MAC table will update dynamically.

4.2   Filtering and Forwarding

When one packet comes in from any port of the switch, it will check the destination address besides the source address learning. The switch will look up the address table for the destination address. If not found, this packet will be forwarded to all the other ports except the port where this packet comes in. If found, and the destination address is located at different port from this packet comes in, the packet will be forwarded to the port where this destination address is located according to the information of address table. But, if the destination address is located at the same port as this packet comes in then this packet will be filtered.

4.3   Store and Forward

Store-and-forward is one kind of packet-forwarding methodology. As a store-and-forward switch, it will store the complete packet in the internal buffer and do the complete error checking before transmitting to the network. Therefore, no error packets will disturb the network. It is the best choice when a network needs efficiency and stability.

5. Product Specifications

Standard	IEEE802.3, 10BASE-T
	IEEE802.3u, 100BASE-TX
Interface	RJ-45 x 16 NWay switching ports
Cable Connections	RJ-45 (10BASE-T) : UTP Category 3,4,5
	RJ-45 (100BASE-TX) : UTP Category 5
Network Data Rate	Auto-negotiation (10Mbps, 100Mbps)
Transmission Mode	Auto-negotiation (Full-duplex, Half-duplex)
LED indications	System
	Power x1
	Port
	100M
	Link/Activity
System Buffer Memory	512KBytes
MAC Address Table	8K entries and 128 entries of CAM
Filtering/Forwarding Rate	10Mbps: 14,880pps/14,880pps
	100Mbps: 148,800pps/148,800pps
Emission	FCC Class A, CE
Operating Temperature	$0^0 \sim 50^0$C ($32^0 \sim 122^0$F)
Operating Humidity	10% - 90%
Power Supply	100~240 VAC, 50/60 Hz